


6ASJK-SL6

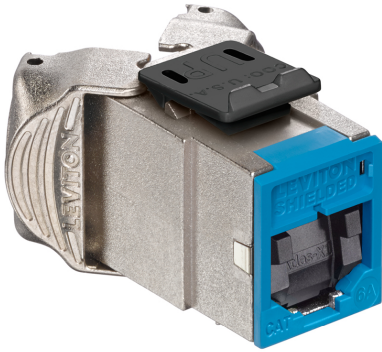

ATLAS-X1™ Cat 6A Shielded QUICKPORT™ Jack with Shutters, Component-Rated, Blue

The ATLAS-X1 Cat 6A Component-Rated Shielded QUICKPORT Copper Jack supports 10GBASE-T networks. The shielded jack provides superior alien crosstalk (AXT) suppression and protects critical data from potential EMI/RFI (electromagnetic interference /radio frequency interference). The jack is part of a complete ATLAS-X1 Cat 6A shielded system, ideal for government, healthcare, manufacturing, transportation, gaming, and other environments where EMI/RFI and/or security may be a concern.

Color :  Blue

UPC Code : 078477700334

Country Of Origin : Mexico

Technical Information

Product Features

Product Family : Jacks

Brand : ATLAS-X1

Category Rating : Cat 6A

Color : Blue

Shielding : Shielded

Termination Type : Tool-Free

Packaging : Single

Shutter Mechanism :
Shuttered

Features and Benefits

- Independently tested and guaranteed to exceed all component, permanent link, and channel margins
- Patented Retention Force Technology™ (RFT) protects against tine damage and increases system longevity
- For Power over Ethernet (PoE), RFT maintains contact force between plug and jack, preventing arcing from intermittent disconnects
- Shielding provides EMI/RFI protection, signal isolation, and excellent AXT suppression
- Unique design supports tool-free termination/re-termination and requires no specialized termination tool
- Short jack design supports a wider range of applications (e. g. shallow boxes, enclosures, and bend radius)
- Terminates from 26- to 22-AWG solid or stranded conductors for use on various cable types
- Robust IDCs can withstand 20 re-termination cycles and jack contacts are tested for 3,000 plug-mating cycles to ensure system longevity
- Available in 13 ANSI/TIA-606-C compatible colors
- Select jacks available with interchangeable icons (voice, data, A/V, and blank, color-coded to match the jack face) for easy identification and tracking of data, voice, or other functions
-

- Jack with internal shutter protects against dust and debris
- Solid metal body dissipates 53% more heat than traditional plastic, minimizing damage from excess heat in PoE applications
- Tine geometry prevents arcing damage where plug and jack make contact

Patents*

USD901509	CA2945752
US9627827	EP3132510
CA2699970	CA3002040
USD848430	EP3748789
DE602015059202.6	USD752590
USD818469	MX385657
EP3363082	US9496644
MX289317	US9515437
MX369099	US7824231
EP2191541	

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

<p>JOB NAME:</p> <input style="width: 90%; height: 20px;" type="text"/>	<p>CATALOG NUMBERS:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> <td style="width: 50%; border: 1px solid black; height: 20px;"></td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table>				
<p>JOB NUMBER:</p> <input style="width: 90%; height: 20px;" type="text"/>					

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 · FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.