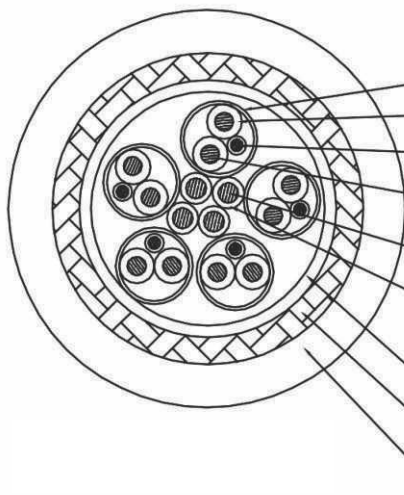
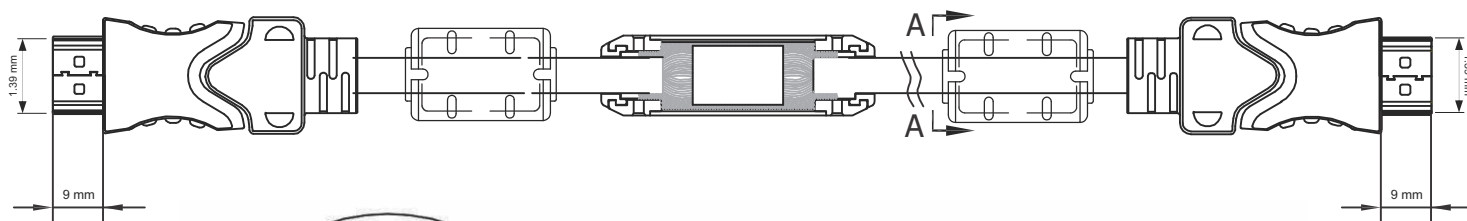









2.0 HDMI CABLE
VERSION HIGH-DEFINITION MULTIMEDIA INTERFACE

FICHA TECNICA:
ZZ-HAA01-25M / 24 AWG
ZZ-HAA01-30M / 24 AWG
ZZ-HAA01-50M / 24 AWG



Aluminio + Mylar: 4 * (8 + 11) AL/MY/MY
Aislamiento: 5 Pares, Polietileno Espumado (FPE), Diámetro: Ø 1.25 ±0.02
Conductor: 5Cables x [28 AWG (1 / 0.30 CU x 1 par)]
Conductor: 5 Pares x [24AWG(1 / 0.50 CU x 1 par)]
Conductor: 4 Cables x 28 AWG (0.32 CU)
Aislamiento: 4 Cables, Diámetro: Ø 0.6 ± 0.03, Polietileno de Alta Densidad (HDPE)
Aluminio + Mylar: 0.025 * 30 mm
Costura Trenzada: 16/6/0.12 Aluminio
Cubierta: PVC, Diámetro: Ø 9.0 ± 0.25 mm, Negro

HDMI V2.0	SIGNAL ASSIGNMENT		HDMI V2.0
1 Red		Red 1	
2 Earth		Earth 2	
3 White		White 3	
4 Blue		Blue 4	
5 Earth		Earth 5	
6 White		White 6	
7 Green		Green 7	
8 Earth		Earth 8	
9 White		White 9	
10 Brown		Brown 10	
11 Earth		Earth 11	
12 White		White 12	
14 Orange		Orange 14	
17 Earth		Earth 17	
19 White		White 19	
13	Yellow CEC Yellow	13	
15	Orange SCL Orange	15	
16	White SDA White	16	
18	Red +5 Volts Power Red	18	
20		20	

LONGITUD (MT)	LONGITUD 1 (MT)	LONGITUD 2 (MT)
30.0 ±0.3	20.0 ±0.2	10.0 ±0.1
50.0 ±0.5	32.0 ±0.32	18.0 ±0.18

